

8-1 Portable Dock USB Type-C® 10Gbps to HDMI™ and DisplayPort™ 8K30Hz PD Max.100Watt



Product Name:

8-1 Portable Dock USB Type-C® 10Gbps to HDMI™ and DisplayPort™ 8K30Hz PD Max.100Watt

Product Series: Hub

Product Code: CSV-2551

EAN code: 8719214473488

UPC code: 841615103737

Description:

- 8-PORT USB Type-C®: Expand the connectivity of a USB Type-C® computer by adding three USB 10Gbps Ports (2x USB Type-A, 1x Type-C®) a Power Delivery 3.0 USB Type-C® Port Max. 100Watt.
- 1 GBASE-T GIGABIT ETHERNET: Features a 1Gb network controller that delivers speeds of 10/100/1000Mbps; For laptops / devices without a USB Type-A or Ethernet, such as MacBook /iPad Air / Pro; USB Type-C® connectivity while providing power for PD3.0 charging.
- RELIABLE PERFORMANCE: USB bus powered or via external USB Type-C® power adapter; 100W Power Delivery 3.0 pass through with 15W dedicated to the functioning of this product, the rest power (max 85W) will be passed for charging the host.

Features:


- Support DP1.4 Alt mode.
- Support 2x 4K/30Hz simultaneously.
- Support 8/10/12bpc color depth output.
- Support HDCP 2.2&HDCP1.4.
- 1x USB Type-C® data port and 2x USB Type-A 2 support max 10Gbps data transmission.
- USB Type-A data port and 1 USB Type-A port support max 7.5W(5V@1.5A) downstream charging per port.
- Ethernet Support 10M/100M/1000M bandwidth.
- SD/TF card slots support to transmission data with max 104MBps, allow SD/Micro SD to work simultaneously.
- Support Fast Role Swap of PD 3.0, the connected device will not get disconnected while plugging out PD Adapter.
- 2x USB Type-A port share max 9W(5V/1.8A).

Supported resolutions:

2x 4K30Hz

OS Support:

Windows 10 upwards, macOS 15

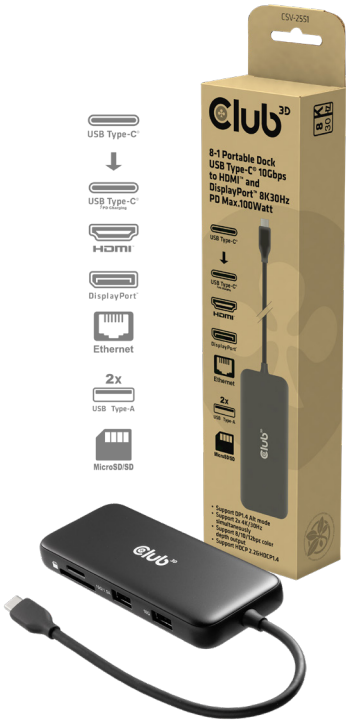

In the box:

- 1x 8-1 Portable Dock USB Type-C® 10Gbps to HDMI™ and DisplayPort™ 8K30Hz PD Max.100Watt

Available Interfaces

Input:

- 1x USB 10Gbps

Output:

- 1x USB-C® PD
- 1x HDMI™ 2.1
- 1x DisplayPort™ 1.4
- 1x Ethernet 1G
- 1x USB-A 10Gbps
- 1x USB-A 10Gbps
- 1x MicroSD/SD 4.0

Other info:

- Box size: 6 x 24 x 3.5cm / 2.36 x 9.45 x 1.38in
- Output cable length approx.: 17cm / 6.7in
- Connector dimensions:
Type-C® 3.62 x 1.2 x 0.63cm / 1.43 x 0.47 x 0.25in
Type-C® PD 3.62 x 1.2 x 0.63cm / 1.43 x 0.47 x 0.25in
- Device Weight: 107g / 3.77oz
- Box Weight: 28g / 0.99oz
- LDPE Bag Weight: 2g / 0.07oz
- Total Weight: 137g / 4.83oz
- Meets ROHS, FCC, and CE EMI requirements

Input:



Output:



Please use one of our Extension/Adapter cables to connect to your devices: In case you need assistance to choose the correct cable, please visit our website www.club-3d.com or feel free to mail us at support@club-3d.com and it will be our pleasure to assist you.

Club 3D uses Bio-Degradable bags according to the EN/DIN 13432.



Club 3D uses environmentally friendly packaging and is printed on recycled paper.



Disclaimer: While we endeavour to provide the most accurate, up-to-date information available, the content on this document may be out of date or include omissions, inaccuracies or other errors. Products might obtain a certification during their lifetime. This doesn't change or alter the product specifications and/or performance in any way. Club 3D will provide the updated information on their website www.club-3d.com at her discretion. Therefore Club 3D does not accept any rights claimed on the content of this document. Please refer to a full overview of our Legacy Terms and Conditions on www.club-3d.com. All other brand names are trademarks or registered trademarks and are the property of their respective owners. All content is subject to change without prior notice.